Nero

Opal Pull Out Sink Mixer

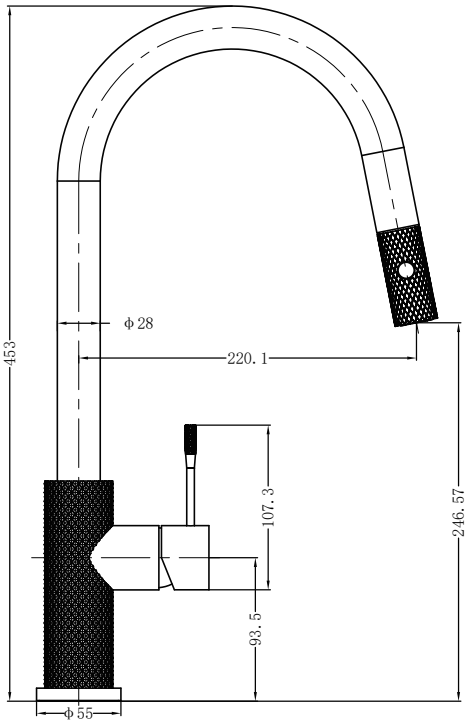

SPECIFICATION

PRODUCT CODE	YSW2519-08
WELS RATING	5Star 5L/Min
WATERMARK LICENSE	WM-060073
TEMPERATURE RATING	Min 1℃-Max 75℃
PERSSURE RATING	Min 150KPa-Max 500Kpa

AVAILABLE FINISH

GRAPHITE
NR251908GR

BRUSHED NICKEL
NR251908BN

BRUSHED BRONZE
NR251908BZ

BRUSHED GOLD
NR251908BG

MAINTENANCE AND CARE

All surfaces should be cleaned with mild liquid detergent or soap and water. Do not use cream cleaners or citrus based cleaning products, as they are abrasive. Use of unsuitable cleaning agents may damage the surface.Any damage caused in this way will not be covered by warranty

PACKING INCLUDES

-1x sink mixer
-1x triangular support
-1x counter weight
-1x hose tail
-2x flexible hose
-1x threaded pipe kit
-1x allen key

15 YEARS WARRANTY 15

WaterMark
AS/NZS 3718
WM-060073

WATER RATING
5.0 litres per minute

1

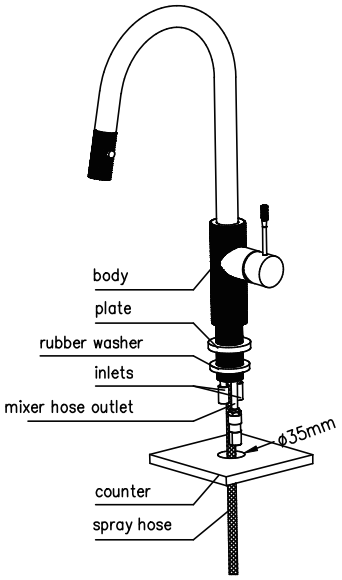

Use a 35mm hole saw cut a hole through the counter.
Remove the lock nut, triangle plate, steel washer. Feed spray hose through the hole and position the mixer over the hole.

2

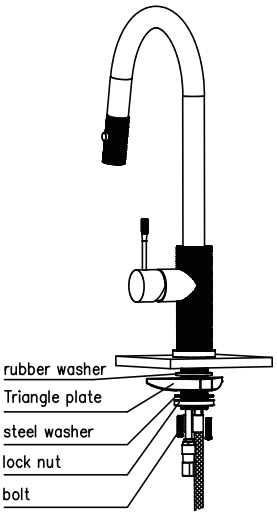

Slide the rubber washer , triangle plate and steel washer and lock nut over spray hose ,srew onto thread pipe. Tighten the lock nut firmly and then tighten the 2 bolts on the lock nut firmly as well.

3

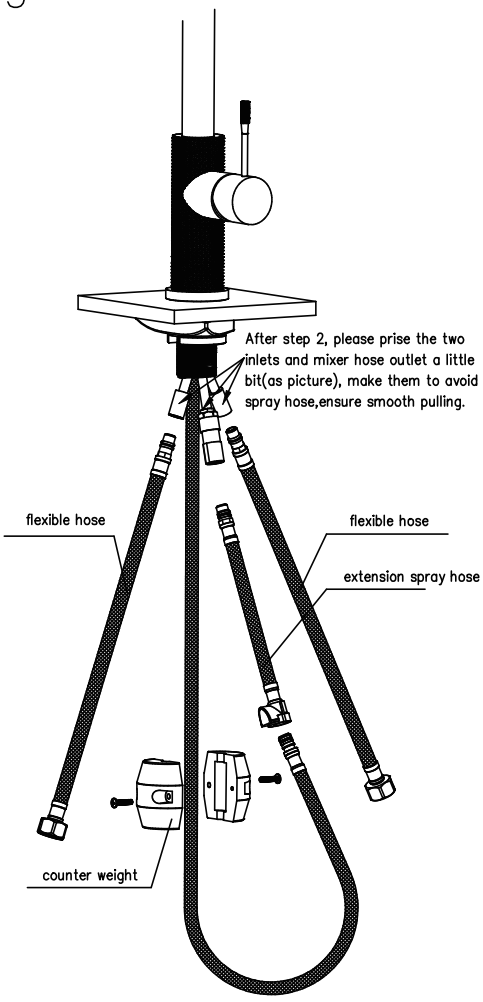

4

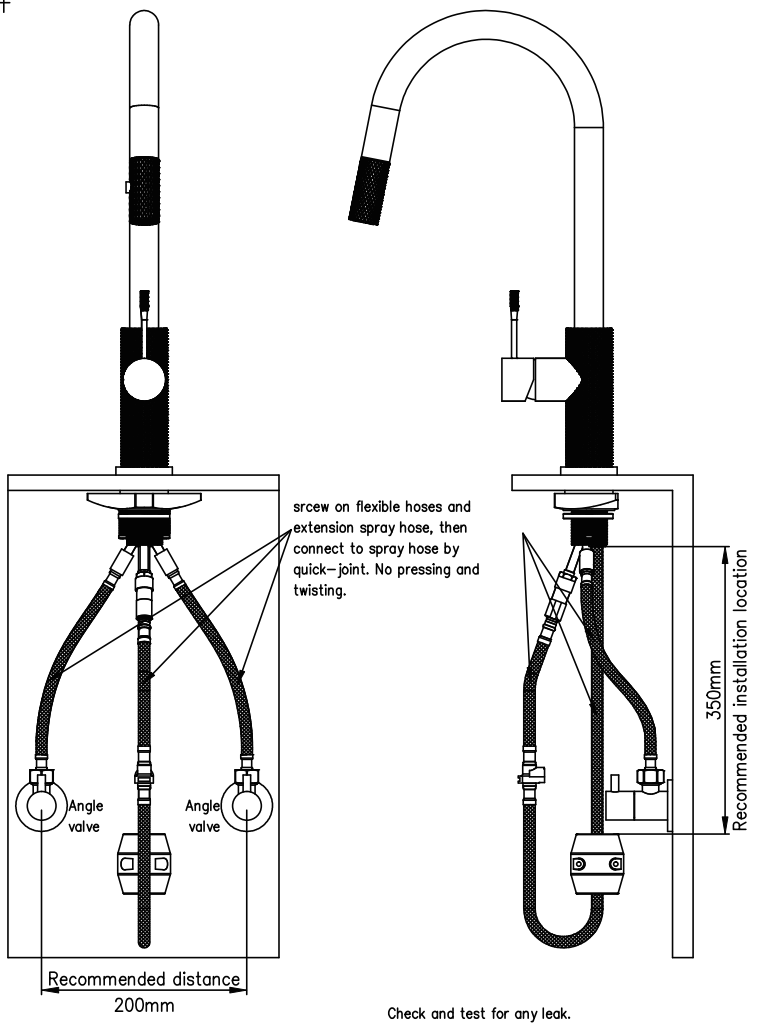

Check and test for any leak.